

# ChemSet™ Reo 502™ Xtrem™

CHEMICAL INJECTION - NON-CRACKED & CRACKED CONCRETE

AVAILABLE IN AUSTRALIA ONLY

(New Zealand refer to EPCON™ G5 Xtrem™ range)

## GENERAL INFORMATION

| Performance Related | Material Specification | Installation Related |
|---------------------|------------------------|----------------------|
|                     |                        |                      |

### Product

ChemSet™ Reo 502™ Xtrem™ is a heavy duty pure Epoxy for anchoring threaded studs and reinforcing bar into cracked and uncracked concrete.

### Compliance

European Technical Assessment (option 1) - ETA-25/0648

Design according to:

- AS 5216 (formerly TS101)
- EN 1992-4 (formerly ETAG001 Annex C, E & TR045)
- Use enclosed data for simplified calculation method

Use Ramset™ iExpert Anchor Software for optimised calculation or where a greater range of anchor layout detail is needed.

### Benefits, Advantages and Features

- 100 year working Life

Greater productivity:

- Anchors in dry, damp, wet or flooded holes
- Easy dispensing even in cold weather

Greater security:

- Strong bond
- Rated for sustained loading


Versatile:

- Anchors in carbide drilled and diamond drilled holes
- Cold and temperate climates

Greater safety:

- Low odour
- VOC Compliant
- Suitable for contact with drinking water

### Installation

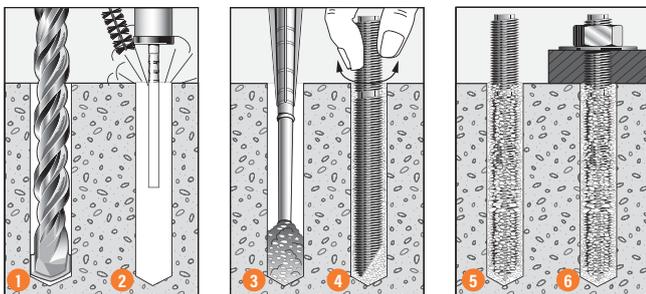

- Drill recommended diameter and depth hole.
- Important:** For hammer drilling technique clean dust and debris from hole with stiff wire brush and blower in the following sequence: blow x 2, brush x 2, blow x 2, brush x 2, blow x 2. For diamond drilling technique refer to **ETA-25/0648**.
- Screw mixing nozzle onto cartridge and dispense adhesive to waste until colour is uniform orange.  
Insert mixing nozzle to bottom of hole.  
Fill hole to 2/3 the hole depth slowly, ensuring no air pockets form.
- Insert **Ramset™ ChemSet™ Anchor Stud/rebar** to bottom of hole while turning.
- Allow **ChemSet™ Reo 502™ XTREM™** to cure as per setting times.
- Attach fixture.



### Principal Applications

- Threaded Studs
- Starter Bars
- Threaded Inserts
- Over-head installation
- Steel Columns
- Hand Rails
- Road Stitching

### Recommended Installation Temperatures

|           | Minimum | Maximum |
|-----------|---------|---------|
| Substrate | 5°C     | 40°C    |
| Adhesive  | 5°C     | 40°C    |

### Service Temperature Limits

|                    |
|--------------------|
| T1: -40°C to +40°C |
| T2: -40°C to +60°C |
| T3: -40°C to +75°C |

### Setting Times

| Temperature of base material | Gel Time | Curing time in dry concrete | Curing time in wet and flooded concrete |
|------------------------------|----------|-----------------------------|---|
| 5°C                          | 75 min   | 30h                         | 60 h                                    |
| 10°C                         | 45 min   | 22h                         | 44 h                                    |
| 15°C                         | 35 min   | 14h                         | 28 h                                    |
| 20°C                         | 22 min   | 7h                          | 14 h                                    |
| 25°C                         | 14 min   | 5h                          | 10 h                                    |
| 30°C                         | 8 min    | 4h                          | 8 h                                     |
| 35°C                         | 6 min    | 3h                          | 6h                                      |
| 40°C                         | 4 min    | 2h 45min                    | 5h 30min                                |

# ChemSet™ Reo 502™ Xtrem™

CHEMICAL INJECTION - NON-CRACKED & CRACKED CONCRETE

AVAILABLE IN AUSTRALIA ONLY

## Installation and performance details: ChemSet™ Reo 502™ Xtrem™ and ChemSet™ Anchor Studs

| Anchor size, d <sub>b</sub> (mm) | Installation Details                       |  |                                |  | Optimum dimensions*                |                                     |   |
|----------------------------------|--|--|--------------------------------|--|------------------------------------|-------------------------------------|---|
|                                  | Drilled hole diameter, d <sub>h</sub> (mm) | Fixture hole diameter, d <sub>f</sub> (mm) | Anchor effective depth, h (mm) | Tightening torque, T <sub>i</sub> (Nm) | Edge distance, e <sub>c</sub> (mm) | Anchor spacing, a <sub>c</sub> (mm) | Concrete substrate thickness, b <sub>m</sub> (mm) |
| M10                              | 12   | 12   | 90                             | 20                                     | 135                                | 270                                 | 120   |
| M12                              | 14   | 14   | 110                            | 30                                     | 165                                | 330                                 | 140   |
| M16                              | 18   | 18   | 125                            | 60                                     | 187.5                              | 375                                 | 160   |
| M20                              | 25   | 22   | 150                            | 120                                    | 225                                | 450                                 | 190   |
|                                  |  |  | 170                            |  | 255                                |                                     | 220   |
| M24                              | 28   | 26   | 160                            | 150                                    | 240                                | 480                                 | 200   |
|                                  |  |  | 210                            |  | 315                                |                                     | 270   |
| M30                              | 35   | 33   | 280                            | 180                                    | 420                                | 840                                 | 350   |

\* Note: For shear loads acting towards an edge or where these optimum dimensions are not achievable, please use the simplified strength limit state design process to verify capacity.

| Anchor size, d <sub>b</sub> (mm) | Reduced Characteristic Capacity# |                                   |                              |                                   |                                |                                   |   |        |       |
|----------------------------------|----------------------------------|-----------------------------------|------------------------------|-----------------------------------|--------------------------------|-----------------------------------|---|--------|-------|
|                                  | Grade 5.8 Steel Studs            |                                   | Grade 8.8 Steel Studs        |                                   | ANSI 316 Stainless Steel Studs |                                   | Non-Cracked Concrete                          |        |       |
|                                  | Shear, φV <sub>us</sub> (kN)     | Tension, φN <sub>us</sub> (kN)*** | Shear, φV <sub>us</sub> (kN) | Tension, φN <sub>us</sub> (kN)*** | Shear, φV <sub>us</sub> (kN)   | Tension, φN <sub>us</sub> (kN)*** | Tension, φN <sub>uc</sub> (kN)**              |        |       |
|                                  |                                  |                                   |                              |                                   |                                |                                   | Concrete Compressive Strength, f <sub>c</sub> |        |       |
|                                  |                                  |                                   |                              |                                   |                                | 20 MPa                            | 32 MPa  | 40 MPa |       |
| M10                              | 11.8                             | 18.9                              | 17.5                         | 28.2                              | 14.2                           | 19.8                              | 28.0  | 35.4   | 37.0  |
| M12                              | 17.5                             | 28.1                              | 26.0                         | 41.9                              | 21.1                           | 29.5                              | 37.8  | 47.9   | 53.6  |
| M16                              | 33.1                             | 53.9                              | 50.9                         | 82.1                              | 41.4                           | 57.7                              | 45.8  | 58.0   | 64.9  |
| M20                              | 49.9                             | 81.3                              | 76.8                         | 123.9                             | 62.4                           | 87.1                              | 60.2  | 76.2   | 85.4  |
|                                  |                                  |                                   |                              |                                   |                                |                                   | 72.6  | 91.9   | 103.0 |
| M24                              | 72.3                             | 117.8                             | 111.3                        | 179.5                             | 90.4                           | 126.2                             | 66.3  | 84.0   | 94.0  |
|                                  |                                  |                                   |                              |                                   |                                |                                   | 99.7  | 126.2  | 141.4 |
| M30                              | -                                | -                                 | 185.5                        | 299.2                             | -                              | -                                 | 153.5   | 194.4  | 217.7 |

\*\*Note: Reduced characteristic ultimate concrete tensile capacity = φN<sub>uc</sub> and N<sub>uc</sub> = Characteristic ultimate concrete tensile capacity. For value of φ refer to Table 2a

For conversion to Working Load Limit MULTIPLY φN<sub>uc</sub> x 0.5

\*\*\*Note: Reduced characteristic ultimate steel tensile capacity = φN<sub>us</sub> where φ = 0.67 and N<sub>us</sub> = Characteristic ultimate steel tensile capacity.

For conversion to Working Load Limit MULTIPLY φN<sub>us</sub> x 0.67 for Gr 5.8 & Gr 8.8

#Note: Design Tensile Capacity φN<sub>us</sub> = minimum of φN<sub>uc</sub> and φN<sub>us</sub>

For Cracked Concrete performance, please use the simplified strength limit state design process to verify capacity.

Data is based on a Service temperature limit of -40°C to +40°C

All data relevant for Dry and Wet Holes. For Flooded Holes MULTIPLY φN<sub>uc</sub> x 0.63

For optimised performance data, including performance based on diamond drilling technique, please use Ramset iExpert Anchoring Software.

### DESCRIPTION AND PART NUMBERS

| Description           | Cartridge Size | Part No. |
|-----------------------|----------------|----------|
| ChemSet Reo 502 Xtrem | 600ml          | CRE0502X |

### ENGINEERING PROPERTIES

#### ChemSet™ Anchor Studs and Threaded Rod

| Anchor Size, d <sub>b</sub> | Grade 8.8 Threaded Rod              |                                  |                                   |                        | Stainless Steel High Corrosion Resistance HCR Grade 1.4529/1.4565 Threaded Rod |                                  |                                   |                        | Section modulus Z (mm <sup>3</sup> ) |
|-----------------------------|-------------------------------------|----------------------------------|-----------------------------------|------------------------|--|----------------------------------|-----------------------------------|------------------------|--------------------------------------|
|                             | Shank diameter, d <sub>s</sub> (mm) | Stressed Area (mm <sup>2</sup> ) | Yield Strength f <sub>y</sub> MPa | UTS f <sub>u</sub> MPa | Shank diameter, d <sub>s</sub> (mm)  | Stressed Area (mm <sup>2</sup> ) | Yield Strength f <sub>y</sub> MPa | UTS f <sub>u</sub> MPa |                                      |
| M10                         | 8.6                                 | 58                               | 640                               | 800                    | 8.2  | 52.8                             | 450                               | 650                    | 62.3                                 |
| M12                         | 10.4                                | 84.3                             | 640                               | 800                    | 10   | 78.5                             | 450                               | 650                    | 109.2                                |
| M16                         | 14.1                                | 157                              | 640                               | 800                    | 14   | 153.9                            | 450                               | 650                    | 277.5                                |
| M20                         | 17.7                                | 245                              | 640                               | 800                    | 17.2   | 232.4                            | 450                               | 650                    | 540.9                                |
| M24                         | 21.2                                | 353                              | 640                               | 800                    | 20.7   | 336.5                            | 450                               | 650                    | 935.5                                |
| M30                         | 26.7                                | 561                              | 640                               | 800                    | -  | -                                | -                                 | -                      | -                                    |

Refer to "Engineering Properties" for ChemSet™ Anchor Studs Grade 5.8 and AISI 316 Stainless Steel in the SARB ANZ.

Chemical Anchoring - Anchor Studs

# ChemSet™ Reo 502™ Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

Chemical Anchoring - Anchor Studs

## STEP 1 Select anchor to be evaluated

Table 1a Indicative combined loading - interaction diagram

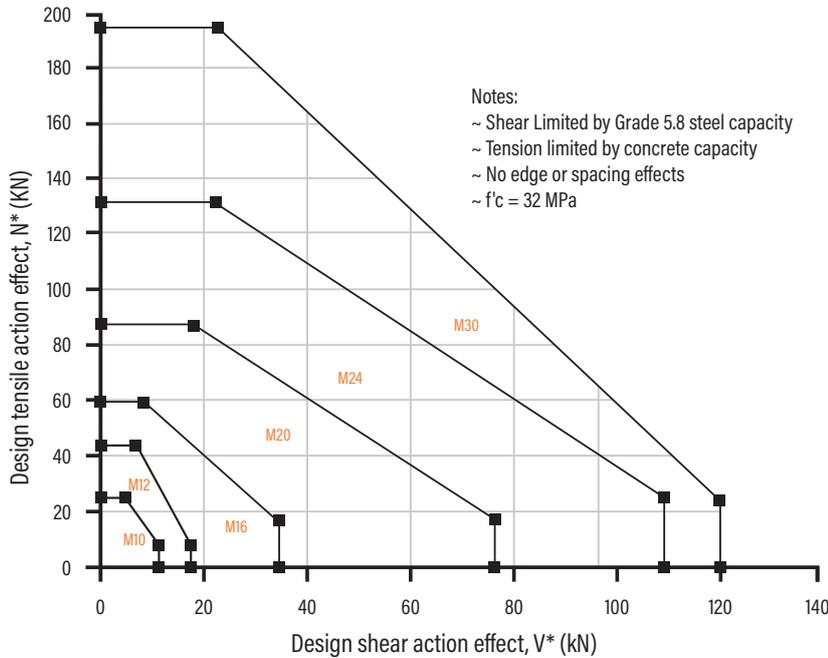


Table 1b Absolute minimum edge distance and anchor spacing values, e<sub>m</sub> and a<sub>m</sub> (mm)

| Anchor size, d <sub>b</sub>          | M10 | M12 | M16 | M20 | M24 | M30 |
|--------------------------------------|-----|-----|-----|-----|-----|-----|
| Min. Anchor Spacing - a <sub>m</sub> | 40  | 50  | 70  | 85  | 90  | 140 |
| Min. Edge Distance - e <sub>m</sub>  | 40  | 40  | 45  | 55  | 60  | 90  |

### Step 1c Calculate anchor effective depth, h (mm)

Refer to "Description and Part Numbers" table for ChemSet Anchor Studs page in the SARB ANZ.

Effective depth, h (mm)  
 Preferred h = h<sub>n</sub> otherwise,  
 $h = L_e - t$   
 t = total thickness of material(s) being fastened.

| Substrate thickness, b <sub>m</sub> (mm) |     |                           |
|--|-----|---------------------------|
| Anchor Stud Size (mm)                    |     |                           |
| M10                                      | M12 | M16 to M30                |
| h + 30mm ≥ 100mm                         |     | h + (2 x d <sub>h</sub> ) |

## Checkpoint 1 Anchor size determined, absolute minima compliance achieved, effective depth (h) calculated.

# ChemSet™ Reo 502™ Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

## STEP 2

### Verify concrete tensile capacity - per anchor

Table 2a Reduced characteristic ultimate concrete tensile capacity,  $\phi N_{uc}$  (kN),  $\phi_c = 1/1.5 = 0.67$ ,  $f'_c = 32$  MPa

| Anchor Size, $d_b$           | Combined pull-out and concrete cone resistance - $\phi N_{ucp}$ |             |             |              |              |              | Concrete Cone Resistance - $\phi N_{ucc}$ |
|------------------------------|---|-------------|-------------|--------------|--------------|--------------|---|
|                              | M10   | M12         | M16         | M20          | M24          | M30          |   |
| Drilled Hole Dia, $d_h$ (mm) | 12  | 14          | 18          | 25           | 28           | 35           |   |
| Effective Depth, $h$ (mm)    |   |             |             |              |              |              |   |
| 70                           | 27.5  |             |             |              |              |              | 24.3                                      |
| 80                           | 31.5  |             |             |              |              |              | 29.7                                      |
| 90                           | <b>35.5</b>   | 40.5        |             |              |              |              | 35.4                                      |
| 100                          | 39.3  | 45.0        |             |              |              |              | 41.5                                      |
| 110                          | 43.3  | <b>49.5</b> | 64.1        |              |              |              | 47.9                                      |
| 120                          | 47.2  | 54.0        | 69.9        |              |              |              | 54.5                                      |
| 125                          | 49.2  | 56.3        | <b>72.8</b> |              |              |              | 58.0                                      |
| 140                          | 55.1  | 63.0        | 81.6        |              |              |              | 68.7                                      |
| 150                          | 59.0  | 67.5        | 87.4        | 102.7        |              |              | 76.2                                      |
| 160                          | 63.0  | 72.0        | 93.2        | 109.6        | 131.0        |              | 84.0                                      |
| 170                          | 66.9  | 76.5        | 99.0        | <b>116.4</b> | 139.2        |              | 91.9                                      |
| 180                          | 70.8  | 81.0        | 104.9       | 123.3        | 147.4        |              | 100.2                                     |
| 190                          | 74.8  | 85.5        | 110.7       | 130.1        | 155.6        |              | 108.6                                     |
| 200                          | 78.7  | 90.0        | 116.5       | 137.0        | 163.8        |              | 117.3                                     |
| 210                          |   | 94.4        | 122.4       | 143.8        | <b>172.0</b> | 202.2        | 126.2                                     |
| 240                          |   | 108.0       | 139.8       | 164.4        | 196.5        | 231.1        | 154.2                                     |
| 280                          |   |             | 163.1       | 191.8        | 229.3        | <b>269.6</b> | 194.4                                     |
| 320                          |   |             | 186.4       | 219.2        | 262.1        | 308.2        | 237.5                                     |
| 350                          |   |             |             | 239.7        | 286.6        | 337.1        | 271.6                                     |
| 400                          |   |             |             | 274.0        | 327.6        | 385.2        | 331.9                                     |
| 450                          |   |             |             |              | 368.5        | 433.4        | 396.0                                     |
| 480                          |   |             |             |              | 393.1        | 462.2        | 436.3                                     |
| 550                          |   |             |             |              |              | 529.7        | 535.1                                     |
| 600                          |   |             |             |              |              | 577.8        | 609.7                                     |

For optimised performance data, including performance based on diamond drilling technique, please use Ramset iExpert Anchoring Software.

Table 2a-2 Cracked Concrete effect, tension,  $X_{ncr}$

| Anchor Size, $d_b$ | Cracked Concrete Effect - $X_{ncr}$                |      |      |      |      |      | $X_{ncr}$<br>where $\phi N_{uc} = \phi N_{ucc}$<br>(from Table 2a) |
|--------------------|--|------|------|------|------|------|--|
|                    | where $\phi N_{uc} = \phi N_{ucp}$ (from Table 2a) |      |      |      |      |      |  |
| $f'_c$ (MPa)       |  |      |      |      |      |      |  |
| 20 to 50           | 0.36   | 0.53 | 0.57 | 0.65 | 0.63 | 0.68 | 0.70   |

Bold values are at Chemset Anchor Stud nominal Depths. For Sustained Loads MULTIPLY  $\phi N_{uc}$  x 0.72 (100 years). All data relevant for Dry and Wet Holes. For Flooded Holes MULTIPLY  $\phi N_{uc}$  x 0.63 For Non-cracked concrete  $X_{ncr} = 1$ .

Calculate  $\phi N_{uc}$  for both  $\phi N_{ucp}$  and  $\phi N_{ucc}$  then choose the minimum - Refer to Checkpoint 2

Table 2b-1 Concrete service temperature limits effect, tension,  $X_{ts}$

| Anchor Size, $d_b$       | Service temperature limits effect, tension, $X_{ts}$ |     |     |      |     |     | $X_{ts}$<br>where $\phi N_{uc} = \phi N_{ucc}$<br>(from Table 2a) |
|--------------------------|--|-----|-----|------|-----|-----|---|
|                          | M10  | M12 | M16 | M20  | M24 | M30 |   |
| Service temperature (°C) |  |     |     |      |     |     |   |
| T1: -40°C to +40°C       |  |     |     | 1.00 |     |     | 1.00  |
| T2: -40°C to +60°C       |  |     |     | 0.84 |     |     |   |
| T3: -40°C to +75°C       |  |     |     | 0.26 |     |     |   |

Table 2b-2 Concrete compressive strength effect, tension,  $X_{nc}$

| NON-CRACKED        | Non-Cracked Concrete - $X_{nc}$                    |      |      |      |      |      | $X_{nc}$<br>where $\phi N_{uc} = \phi N_{ucc}$<br>(from Table 2a) |
|--------------------|--|------|------|------|------|------|---|
|                    | where $\phi N_{uc} = \phi N_{ucp}$ (from Table 2a) |      |      |      |      |      |   |
| Anchor Size, $d_b$ |  |      |      |      |      |      |   |
| $f'_c$ (MPa)       |  |      |      |      |      |      |   |
| 20                 | 0.91   | 0.91 | 0.87 | 0.87 | 0.83 | 0.83 | 0.79  |
| 25                 | 0.95   | 0.95 | 0.93 | 0.93 | 0.91 | 0.91 | 0.88  |
| 32                 | 1.00   | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00  |
| 40                 | 1.05   | 1.05 | 1.07 | 1.07 | 1.09 | 1.09 | 1.12  |
| 50                 | 1.09   | 1.09 | 1.14 | 1.14 | 1.20 | 1.20 | 1.25  |


| CRACKED            | Cracked Concrete - $X_{nc}$                        |      |      |      |      |      | $X_{nc}$<br>where $\phi N_{uc} = \phi N_{ucc}$<br>(from Table 2a) |
|--------------------|--|------|------|------|------|------|---|
|                    | where $\phi N_{uc} = \phi N_{ucp}$ (from Table 2a) |      |      |      |      |      |   |
| Anchor Size, $d_b$ |  |      |      |      |      |      |   |
| $f'_c$ (MPa)       |  |      |      |      |      |      |   |
| 20                 | 0.95   | 0.95 | 0.95 | 0.91 | 0.91 | 0.87 | 0.79  |
| 25                 | 0.98   | 0.98 | 0.98 | 0.95 | 0.95 | 0.93 | 0.88  |
| 32                 | 1.00   | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00  |
| 40                 | 1.02   | 1.02 | 1.02 | 1.05 | 1.05 | 1.07 | 1.12  |
| 50                 | 1.05   | 1.05 | 1.05 | 1.09 | 1.09 | 1.14 | 1.25  |

# ChemSet™ Reo 502™ Xtrem™

## STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

Chemical Anchoring - Anchor Studs



$$X_{ne} = 0.25 + 0.5 \cdot (e/h)$$


Where  $e_m \leq e \leq e_c$

$$e_c = 1.5 \cdot h$$

Note: Tabled values are based on the nominal effective depth, h shown in the installation details. For other values of  $X_{ne}$ , please use equation shown above.

Table 2c - Concrete Edge distance effect, tension,  $X_{ne}$

| Anchor size, $d_b$           | M10  | M12  | M16  | M20  | M24  | M30  |
|------------------------------|------|------|------|------|------|------|
| <b>Edge distance, e (mm)</b> |      |      |      |      |      |      |
| 40                           | 0.47 | 0.43 |      |      |      |      |
| 45                           | 0.50 | 0.45 | 0.43 |      |      |      |
| 50                           | 0.53 | 0.48 | 0.45 |      |      |      |
| 55                           | 0.56 | 0.50 | 0.47 | 0.41 |      |      |
| 60                           | 0.58 | 0.52 | 0.49 | 0.43 | 0.39 |      |
| 65                           | 0.61 | 0.55 | 0.51 | 0.44 | 0.40 |      |
| 70                           | 0.64 | 0.57 | 0.53 | 0.46 | 0.42 |      |
| 90                           | 0.75 | 0.66 | 0.61 | 0.51 | 0.46 | 0.41 |
| 100                          | 0.81 | 0.70 | 0.65 | 0.54 | 0.49 | 0.43 |
| 115                          | 0.89 | 0.77 | 0.71 | 0.59 | 0.52 | 0.46 |
| 135                          | 1    | 0.86 | 0.79 | 0.65 | 0.57 | 0.49 |
| 165                          |      | 1    | 0.91 | 0.74 | 0.64 | 0.54 |
| 187                          |      |      | 1    | 0.80 | 0.70 | 0.58 |
| 255                          |      |      |      | 1    | 0.86 | 0.71 |
| 315                          |      |      |      |      | 1    | 0.81 |
| 420                          |      |      |      |      |      | 1    |

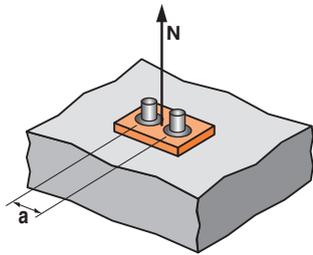

$$X_{na} = 0.5 + a/(6 \cdot h)$$

Where  $a_m \leq a \leq a_c$

$$a_c = 3 \cdot h$$

Note: Tabled values are based on the nominal effective depth, h shown in the installation details. For other values  $X_{na}$ , please use equation shown above.

Table 2d - Concrete anchor spacing effect, tension,  $X_{na}$

| Anchor size, $d_b$            | M10  | M12  | M16  | M20  | M24  | M30  |
|-------------------------------|------|------|------|------|------|------|
| <b>Anchor spacing, a (mm)</b> |      |      |      |      |      |      |
| 40                            | 0.57 |      |      |      |      |      |
| 45                            | 0.58 |      |      |      |      |      |
| 50                            | 0.59 | 0.58 |      |      |      |      |
| 55                            | 0.60 | 0.58 |      |      |      |      |
| 60                            | 0.61 | 0.59 |      |      |      |      |
| 70                            | 0.63 | 0.61 | 0.59 |      |      |      |
| 85                            | 0.66 | 0.63 | 0.61 | 0.58 |      |      |
| 90                            | 0.67 | 0.64 | 0.62 | 0.59 | 0.57 |      |
| 140                           | 0.76 | 0.71 | 0.69 | 0.64 | 0.61 | 0.58 |
| 170                           | 0.81 | 0.76 | 0.73 | 0.67 | 0.63 | 0.60 |
| 200                           | 0.87 | 0.80 | 0.77 | 0.70 | 0.66 | 0.62 |
| 270                           | 1    | 0.91 | 0.86 | 0.76 | 0.71 | 0.66 |
| 330                           |      | 1    | 0.94 | 0.82 | 0.76 | 0.70 |
| 375                           |      |      | 1    | 0.87 | 0.80 | 0.72 |
| 510                           |      |      |      | 1    | 0.90 | 0.80 |
| 630                           |      |      |      |      | 1    | 0.88 |
| 840                           |      |      |      |      |      | 1    |

**Checkpoint 2**

Design reduced ultimate concrete tensile capacity,  $\phi N_{urc}$

$$\phi N_{urc} = \text{minimum of } \phi N_{ucp} \cdot X_{ncr} \cdot X_{ns} \cdot X_{nc} \cdot X_{ne} \cdot X_{na} \text{ and } \phi N_{ucc} \cdot X_{ncr} \cdot X_{ns} \cdot X_{nc} \cdot X_{ne} \cdot X_{na}$$

**STEP 3**

### Verify anchor tensile capacity - per anchor

Table 3a Reduced characteristic ultimate steel tensile capacity,  $\phi N_{us}$  (kN) where  $\phi_n = 0.67$  for Gr 5.8 & Gr 8.8

| Anchor size, $d_b$                          | M10  | M12  | M16  | M20   | M24   | M30   |
|---|------|------|------|-------|-------|-------|
| ChemSet™ Anchor Stud Grade 5.8 Carbon Steel | 18.9 | 28.1 | 53.9 | 81.3  | 117.8 | -     |
| ChemSet™ Anchor Stud A4/316 Stainless Steel | 19.8 | 29.5 | 57.7 | 87.1  | 126.2 | -     |
| ChemSet™ Anchor Stud Grade 8.8 Carbon Steel | 28.2 | 41.9 | 82.1 | 123.9 | 179.5 | 299.2 |

Note  $\phi_n = 0.58$  for ChemSet™ Anchor Stud A4/316 Stainless Steel

**Checkpoint 3**

Design reduced ultimate tensile capacity,  $\phi N_{ur}$

$$\phi N_{ur} = \text{minimum of } \phi N_{urc} \text{ or } \phi N_{us}$$

Check  $N^*/\phi N_{ur} \leq 1.0$ ,

if not satisfied return to step 1

# ChemSet™ Reo 502™ Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

Chemical Anchoring - Anchor Studs

## STEP 4

### Step 4 - Verify concrete shear capacity - per anchor

Table 4a - 1 Reduced characteristic ultimate concrete edge shear capacity,  $\phi V_{uc}$  (kN),  $\phi = 1/1.5 = 0.67$ ,  $f'_c = 32$  MPa


| Anchor size, $d_b$        | M10      | M12      | M16       | M20       | M24       | M30       |
|---------------------------|----------|----------|-----------|-----------|-----------|-----------|
| Effective depth, $h$ (mm) | 70 - 200 | 90 - 240 | 110 - 320 | 150 - 400 | 160 - 480 | 210 - 600 |
| Edge distance, $e_m$      |          |          |           |           |           |           |
| 40                        | 4.3      | 4.7      |           |           |           |           |
| 45                        |          |          | 6.2       |           |           |           |
| 55                        |          |          |           | 9.1       |           |           |
| 60                        |          |          |           |           | 10.8      |           |
| 90                        |          |          |           |           |           | 20.0      |

For optimised performance data, please use Ramset iExpert Anchoring Software.

Table 4a-2 Cracked Concrete effect, shear,  $X_{ver}$

| Anchor size, $d_b$ | M10  | M12 | M16 | M20 | M24 | M30 |
|--------------------|------|-----|-----|-----|-----|-----|
| $X_{ver}$          | 0.70 |     |     |     |     |     |

For Non-cracked concrete  $X_{ver} = 1.0$




Load direction effect, conc. edge shear,  $X_{vd}$

Table 4b - Concrete compressive strength effect, shear,  $X_{vc}$

| $f'_c$ (MPa) | 20   | 25   | 32 | 40   | 50   |
|--------------|------|------|----|------|------|
| $X_{vc}$     | 0.79 | 0.86 | 1  | 1.11 | 1.22 |

Table 4c - Concrete load direction effect, concrete edge shear,  $X_{vd}$

| Angle, $\alpha^\circ$ | 0-55 | 60  | 70  | 80  | 90-180 |
|-----------------------|------|-----|-----|-----|--------|
| $X_{vd}$              | 1    | 1.1 | 1.2 | 1.5 | 2      |




$$X_{ve} = e/e_m * \sqrt{e/e_m}$$

Table 4d - Concrete anchor spacing and edge distance effect, concrete edge shear,  $X_{ve}$

For single anchor fastening  $X_{ve}$


| $e/e_m$  | 1.0  | 1.2  | 1.4  | 1.6  | 1.8  | 2.0  | 2.2  | 2.4  | 2.6  | 2.8  | 3.0  | 3.2  |
|----------|------|------|------|------|------|------|------|------|------|------|------|------|
| $X_{ve}$ | 1.00 | 1.31 | 1.66 | 2.02 | 2.41 | 2.83 | 3.26 | 3.72 | 4.19 | 4.69 | 5.20 | 5.72 |



$$X_{ve} = \frac{3 * e + a}{6 * e_m} * \sqrt{e/e_m}$$

For 2 anchors fastening  $X_{ve}$

| $e/e_m$ | 1.0  | 1.2  | 1.4  | 1.6  | 1.8  | 2.0  | 2.2  | 2.4  | 2.6  | 2.8  | 3.0  | 3.2  |
|---------|------|------|------|------|------|------|------|------|------|------|------|------|
| $a/e_m$ |      |      |      |      |      |      |      |      |      |      |      |      |
| 1.0     | 0.67 | 0.84 | 1.03 | 1.22 | 1.43 | 1.65 | 1.88 | 2.12 | 2.36 | 2.62 | 2.89 | 3.16 |
| 1.5     | 0.75 | 0.93 | 1.12 | 1.33 | 1.54 | 1.77 | 2.00 | 2.25 | 2.50 | 2.76 | 3.03 | 3.31 |
| 2.0     | 0.83 | 1.02 | 1.22 | 1.43 | 1.65 | 1.89 | 2.12 | 2.38 | 2.63 | 2.90 | 3.18 | 3.46 |
| 2.5     | 0.92 | 1.11 | 1.32 | 1.54 | 1.77 | 2.00 | 2.25 | 2.50 | 2.77 | 3.04 | 3.32 | 3.61 |
| 3.0     | 1.00 | 1.20 | 1.42 | 1.64 | 1.88 | 2.12 | 2.37 | 2.63 | 2.90 | 3.18 | 3.46 | 3.76 |
| 3.5     |      | 1.30 | 1.52 | 1.75 | 1.99 | 2.24 | 2.50 | 2.76 | 3.04 | 3.32 | 3.61 | 3.91 |
| 4.0     |      |      | 1.62 | 1.86 | 2.10 | 2.36 | 2.62 | 2.89 | 3.17 | 3.46 | 3.75 | 4.05 |
| 4.5     |      |      |      | 1.96 | 2.21 | 2.47 | 2.74 | 3.02 | 3.31 | 3.60 | 3.90 | 4.20 |
| 5.0     |      |      |      |      | 2.33 | 2.59 | 2.87 | 3.15 | 3.44 | 3.74 | 4.04 | 4.35 |
| 5.5     |      |      |      |      |      | 2.71 | 2.99 | 3.28 | 3.71 | 4.02 | 4.33 | 4.65 |
| 6.0     |      |      |      |      |      | 2.83 | 3.11 | 3.41 | 3.71 | 4.02 | 4.33 | 4.65 |



For 3 anchors fastening and more

$$X_{ve} = \frac{3 * e + a_1 + a_2 + a_3 + \dots + a_{n-1}}{3 * n * e_m} * \sqrt{e/e_m}$$

# ChemSet™ Reo 502™ Xtrem™

## STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

Chemical Anchoring - Anchor Studs

Table 4e Reduced characteristic ultimate concrete pryout capacity,  $\phi V_{ucp}$  (kN),  $\phi = 1/1.5 = 0.67$ ,  $f'_c = 32$  MPa

| Anchor size, $d_b$      | M10  | M12  | M16   | M20   | M24   | M30   |
|-------------------------|------|------|-------|-------|-------|-------|
| Effective depth, h (mm) | 90   | 110  | 125   | 170   | 210   | 280   |
| -40°C to +40°C          | 70.8 | 95.7 | 116.0 | 183.9 | 252.5 | 388.7 |
| -40°C to +60°C          | 59.5 | 83.2 | 116.0 | 183.9 | 252.5 | 388.7 |
| -40°C to +75°C          | 18.4 | 25.7 | 37.9  | 60.5  | 89.4  | 140.2 |




Table 4f Anchor at a corner effect, concrete edge shear,  $X_{vs}$

Note: For  $e_1/e_2 > 1.25$ ,  $X_{vs} = 1.0$

| Edge distance, $e_2$ (mm) | 25   | 30   | 35   | 50   | 60   | 75   | 125  | 200  | 300  | 400  | 600  | 900  |
|---------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Edge distance, $e_1$ (mm) |      |      |      |      |      |      |      |      |      |      |      |      |
| 25                        | 0.86 | 0.77 | 0.70 | 0.58 | 0.53 | 0.49 | 0.41 | 0.37 | 0.35 | 0.34 | 0.32 | 0.32 |
| 30                        | 0.97 | 0.86 | 0.78 | 0.64 | 0.58 | 0.52 | 0.43 | 0.38 | 0.36 | 0.34 | 0.33 | 0.32 |
| 35                        | 1.00 | 0.95 | 0.86 | 0.69 | 0.63 | 0.56 | 0.46 | 0.40 | 0.37 | 0.35 | 0.33 | 0.32 |
| 50                        | 1.00 | 1.00 | 1.00 | 0.86 | 0.77 | 0.67 | 0.52 | 0.44 | 0.39 | 0.37 | 0.35 | 0.33 |
| 60                        | 1.00 | 1.00 | 1.00 | 0.97 | 0.86 | 0.75 | 0.57 | 0.47 | 0.41 | 0.38 | 0.36 | 0.34 |
| 75                        | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.64 | 0.51 | 0.44 | 0.41 | 0.37 | 0.35 |
| 125                       | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.65 | 0.53 | 0.48 | 0.42 | 0.38 |
| 200                       | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 | 0.58 | 0.49 | 0.42 |
| 300                       | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.72 | 0.58 | 0.49 |
| 400                       | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 | 0.55 |
| 500                       | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.77 | 0.61 |
| 600                       | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 | 0.67 |
| 900                       | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.86 |

Checkpoint **4a**

Design reduced ultimate concrete edge shear capacity,  $\phi V_{urc}$

$$\phi V_{urc} = \phi V_{uc} * X_{vcr} * X_{vc} * X_{vd} * X_{ve} * X_{vs}$$

Checkpoint **4b**

Design reduced ultimate concrete pryout capacity,  $\phi V_{urcp}$

$$\phi V_{urcp} = \phi V_{ucp} * X_{ncr} * X_{nc} * X_{ne} * X_{na}$$

STEP **5**

### Verify anchor shear capacity - per anchor

Table 5a Reduced characteristic ultimate steel shear capacity,  $\phi V_{us}$  (kN) where  $\phi_v = 0.67$

| Anchor size, $d_b$                          | M10  | M12  | M16  | M20  | M24   | M30   |
|---|------|------|------|------|-------|-------|
| ChemSet™ Anchor Stud Grade 5.8 Carbon Steel | 11.8 | 17.5 | 33.1 | 49.9 | 72.3  | -     |
| ChemSet™ Anchor Stud A4/316 Stainless Steel | 14.2 | 21.1 | 41.4 | 62.4 | 90.4  | -     |
| ChemSet™ Anchor Stud Grade 8.8 Carbon Steel | 17.5 | 26.0 | 50.9 | 76.8 | 111.3 | 185.5 |

Checkpoint **5**

Design reduced ultimate shear capacity,  $\phi V_{ur}$

$$\phi V_{ur} = \text{minimum of } \phi V_{urc} \phi V_{urcp} \phi V_{us}$$

Check  $V^*/\phi V_{ur} \leq 1.0$ ,

if not satisfied return to step 1

# ChemSet™ Reo 502™ Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

## STEP 6 Combined Loading

### Checkpoint 6

Check  
 $N^*/\phi N_{ur} + V^*/\phi V_{ur} \leq 1.2$ ,  
 if not satisfied return to step 1

**Specify - Threaded Stud Anchors**  
 Ramset™ ChemSet™ Reo 502™ Xtrem™ with  
 (Anchor Size) grade 5.8 ChemSet™ Anchor  
 Stud (Anchor Stud Part Number) Drilled  
 Hole Depth to be (h) mm.

**Example**  
 Ramset™ ChemSet™ Reo 502™ Xtrem™  
 Injection with M16 grade 5.8 ChemSet™  
 Anchor Stud (CS16190GH). Drilled hole depth  
 to be 125mm. To be installed according to  
 Ramset™ Installation Instructions.

Ramset™ iExpert Anchor Software for optimised calculation or where a greater range of anchor layout detail is needed.