

# ChemSet™ Reo 502™ Xtrem™

CHEMICAL INJECTION - NON-CRACKED & CRACKED CONCRETE

AVAILABLE IN AUSTRALIA ONLY

(New Zealand refer to EPCON™ G5 Xtrem™ range)

## GENERAL INFORMATION

Performance Related	Material Specification	Installation Related

### Product

ChemSet™ Reo 502™ Xtrem™ is a heavy duty pure Epoxy for anchoring threaded studs and reinforcing bar into cracked and uncracked concrete.

### Compliance

European Technical Assessment (option 1) - ETA-25/0648

Design according to:

- AS 5216 (formerly TS101)
- EN 1992-4 (formerly ETAG001 Annex C, E & TR045)
- Use enclosed data for simplified calculation method

Use Ramset™ iExpert Anchor Software for optimised calculation or where a greater range of anchor layout detail is needed.

### Benefits, Advantages and Features

- 100 year working Life

#### Greater productivity:

- Anchors in dry, damp, wet or flooded holes

#### Greater security:

- Strong bond
- Rated for sustained loading

#### Versatile:

- Anchors in carbide drilled and diamond drilled holes
- Cold and temperate climates

#### Greater safety:

- Low odour
- VOC Compliant
- Suitable for contact with drinking water



### Principal Applications

- Threaded Studs
- Starter Bars
- Threaded Inserts
- Over-head installation
- Steel Columns
- Hand Rails
- Road Stitching


### Installation & Substrate Temperature Range

Minimum	Maximum
5°C	40°C

### Service Temperature Limits

T1: -40°C to +40°C
T2: -40°C to +60°C
T3: -40°C to +75°C

### Installation

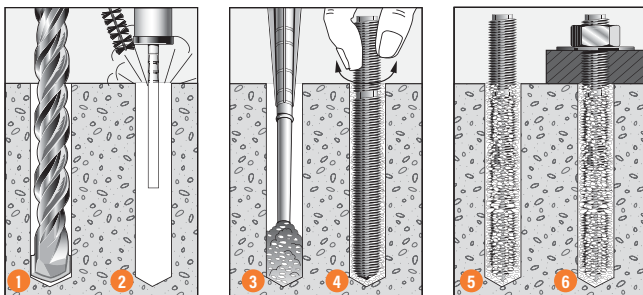

- Drill recommended diameter and depth hole.
- Important:** For hammer drilling technique clean dust and debris from hole with stiff wire brush and blower in the following sequence: blow x 2, brush x 2, blow x 2, brush x 2, blow x 2. For diamond drilling technique refer to **ETA-25/0648**.
- Screw mixing nozzle onto cartridge and dispense adhesive to waste until colour is uniform orange.  
Insert mixing nozzle to bottom of hole.  
Fill hole to 2/3 the hole depth slowly, ensuring no air pockets form.
- Insert **Ramset™ ChemSet™ Anchor Stud/rebar** to bottom of hole while turning.
- Allow ChemSet™ Reo 502™ XTREM™ to cure as per setting times.
- Attach fixture.

### Setting Times

Temperature of base material	Gel Time	Curing time in dry concrete	Curing time in wet and flooded concrete
5°C	75 min	30h	60 h
10°C	45 min	22h	44 h
15°C	35 min	14h	28 h
20°C	22 min	7h	14 h
25°C	14 min	5h	10 h
30°C	8 min	4h	8 h
35°C	6 min	3h	6h
40°C	4 min	2h 45min	5h 30min

# ChemSet™ Reo 502™ Xtrem™

CHEMICAL INJECTION - NON-CRACKED & CRACKED CONCRETE

AVAILABLE IN AUSTRALIA ONLY

## Installation and performance details: ChemSet™ Reo 502™ Xtrem™ and ChemSet™ Anchor Studs

Anchor size, d <sub>b</sub> (mm)	Installation Details				Optimum dimensions*		
	Drilled hole diameter, d <sub>h</sub> (mm)	Fixture hole diameter, d <sub>f</sub> (mm)	Anchor effective depth, h (mm)	Tightening torque, T <sub>t</sub> (Nm)	Edge distance, e <sub>c</sub> (mm)	Anchor spacing, a <sub>c</sub> (mm)	Concrete substrate thickness, b <sub>m</sub> (mm)
M10	12	12	90	20	135	270	120
M12	14	14	110	30	165	330	140
M16	18	18	125	60	187.5	375	160
M20	25	22	150	120	225	450	190
			170		255		220
M24	28	26	160	150	240	480	200
			210		315		270
M30	35	33	280	180	420	840	350

\* Note: For shear loads acting towards an edge or where these optimum dimensions are not achievable, please use the simplified strength limit state design process to verify capacity.

Anchor size, d <sub>b</sub> (mm)	Reduced Characteristic Capacity#								
	Grade 5.8 Steel Studs		Grade 8.8 Steel Studs		ANSI 316 Stainless Steel Studs		Non-Cracked Concrete		
	Shear, φV <sub>us</sub> (kN)	Tension, φN <sub>us</sub> (kN)***	Shear, φV <sub>us</sub> (kN)	Tension, φN <sub>us</sub> (kN)***	Shear, φV <sub>us</sub> (kN)	Tension, φN <sub>us</sub> (kN)***	Tension, φN <sub>uc</sub> (kN)**		
							Concrete Compressive Strength, f <sub>c</sub>		
						20 MPa	32 MPa	40 MPa	
M10	11.8	18.9	17.5	28.2	14.2	19.8	28.0	35.4	37.0
M12	17.5	28.1	26.0	41.9	21.1	29.5	37.8	47.9	53.6
M16	33.1	53.9	50.9	82.1	41.4	57.7	45.8	58.0	64.9
M20	49.9	81.3	76.8	123.9	62.4	87.1	60.2	76.2	85.4
							72.6	91.9	103.0
M24	72.3	117.8	111.3	179.5	90.4	126.2	66.3	84.0	94.0
							99.7	126.2	141.4
M30	-	-	185.5	299.2	-	-	153.5	194.4	217.7

\*\*Note: Reduced characteristic ultimate concrete tensile capacity = φN<sub>uc</sub> and N<sub>uc</sub> = Characteristic ultimate concrete tensile capacity. For value of φ refer to Table 2a

For conversion to Working Load Limit MULTIPLY φN<sub>uc</sub> x 0.5

\*\*\*Note: Reduced characteristic ultimate steel tensile capacity = φN<sub>us</sub> where φ = 0.67 and N<sub>us</sub> = Characteristic ultimate steel tensile capacity.

For conversion to Working Load Limit MULTIPLY φN<sub>us</sub> x 0.67 for Gr 5.8 & Gr 8.8

#Note: Design Tensile Capacity φN<sub>us</sub> = minimum of φN<sub>uc</sub> and φN<sub>us</sub>

For Cracked Concrete performance, please use the simplified strength limit state design process to verify capacity.

Data is based on a Service temperature limit of -40°C to +40°C

All data relevant for Dry and Wet Holes. For Flooded Holes MULTIPLY φN<sub>uc</sub> x 0.63

For optimised performance data, including performance based on diamond drilling technique, please use Ramset iExpert Anchoring Software.

### DESCRIPTION AND PART NUMBERS

Description	Cartridge Size	Part No.
ChemSet Reo 502 Xtrem	600ml	CRE0502X

### ENGINEERING PROPERTIES

#### ChemSet™ Anchor Studs and Threaded Rod

Anchor Size, d <sub>b</sub>	Grade 8.8 Threaded Rod				Stainless Steel High Corrosion Resistance HCR Grade 1.4529/1.4565 Threaded Rod				Section modulus Z (mm <sup>3</sup> )
	Shank diameter, d <sub>s</sub> (mm)	Stressed Area (mm <sup>2</sup> )	Yield Strength f <sub>y</sub> MPa	UTS f <sub>u</sub> MPa	Shank diameter, d <sub>s</sub> (mm)	Stressed Area (mm <sup>2</sup> )	Yield Strength f <sub>y</sub> MPa	UTS f <sub>u</sub> MPa	
M10	8.6	58	640	800	8.2	52.8	450	650	62.3
M12	10.4	84.3	640	800	10	78.5	450	650	109.2
M16	14.1	157	640	800	14	153.9	450	650	277.5
M20	17.7	245	640	800	17.2	232.4	450	650	540.9
M24	21.2	353	640	800	20.7	336.5	450	650	935.5
M30	26.7	561	640	800	-	-	-	-	-

Refer to "Engineering Properties" for ChemSet™ Anchor Studs Grade 5.8 and AISI 316 Stainless Steel in the SARB ANZ.

# ChemSet™ Reo 502™ Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

Chemical Anchoring - Anchor Studs

## STEP 1 Select anchor to be evaluated

Table 1a Indicative combined loading - interaction diagram

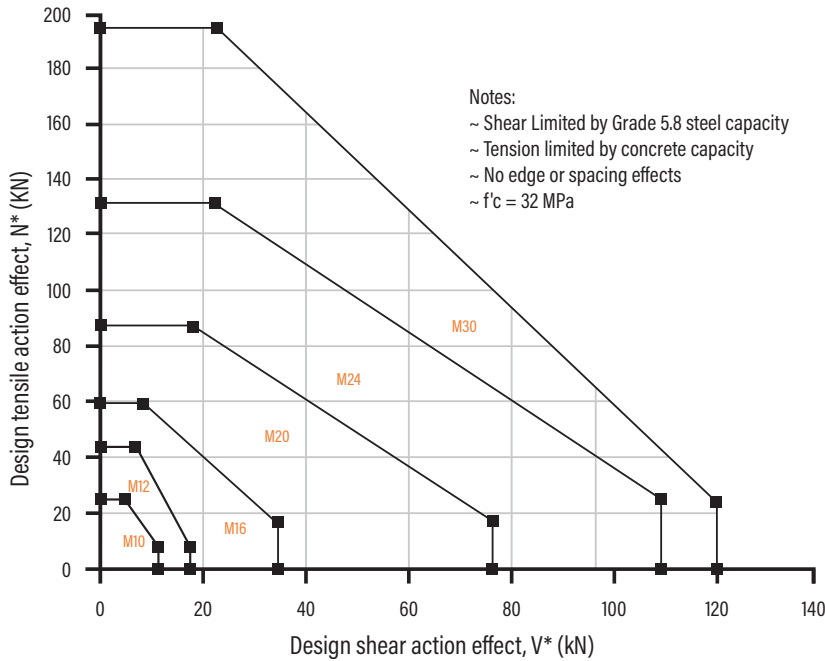


Table 1b Absolute minimum edge distance and anchor spacing values, e<sub>m</sub> and a<sub>m</sub> (mm)

Anchor size, d <sub>b</sub>	M10	M12	M16	M20	M24	M30
Min. Anchor Spacing - a <sub>m</sub>	40	50	70	85	90	140
Min. Edge Distance - e <sub>m</sub>	40	40	45	55	60	90

### Step 1c Calculate anchor effective depth, h (mm)

Refer to "Description and Part Numbers" table for ChemSet Anchor Studs page in the SARB ANZ.

Effective depth, h (mm)

Preferred  $h = h_n$  otherwise,

$h = L_e - t$

t = total thickness of material(s) being fastened.

Substrate thickness, b <sub>m</sub> (mm)		
Anchor Stud Size (mm)		
M10	M12	M16 to M30
$h + 30\text{mm} \geq 100\text{mm}$		$h + (2 \times d_h)$

## Checkpoint 1 Anchor size determined, absolute minima compliance achieved, effective depth (h) calculated.

# ChemSet™ Reo 502™ Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

## STEP 2

### Verify concrete tensile capacity - per anchor

Table 2a Reduced characteristic ultimate concrete tensile capacity,  $\phi N_{uc}$  (kN),  $\phi_c = 1/1.5 = 0.67$ ,  $f'_c = 32$  MPa

Anchor Size, $d_b$	Combined pull-out and concrete cone resistance - $\phi N_{ucp}$						Concrete Cone Resistance - $\phi N_{ucc}$
	M10	M12	M16	M20	M24	M30	
Drilled Hole Dia, $d_h$ (mm)	12	14	18	25	28	35	
Effective Depth, $h$ (mm)							
70	27.5						24.3
80	31.5						29.7
90	<b>35.5</b>	40.5					35.4
100	39.3	45.0					41.5
110	43.3	<b>49.5</b>	64.1				47.9
120	47.2	54.0	69.9				54.5
125	49.2	56.3	<b>72.8</b>				58.0
140	55.1	63.0	81.6				68.7
150	59.0	67.5	87.4	102.7			76.2
160	63.0	72.0	93.2	109.6	131.0		84.0
170	66.9	76.5	99.0	<b>116.4</b>	139.2		91.9
180	70.8	81.0	104.9	123.3	147.4		100.2
190	74.8	85.5	110.7	130.1	155.6		108.6
200	78.7	90.0	116.5	137.0	163.8		117.3
210		94.4	122.4	143.8	<b>172.0</b>	202.2	126.2
240		108.0	139.8	164.4	196.5	231.1	154.2
280			163.1	191.8	229.3	<b>269.6</b>	194.4
320			186.4	219.2	262.1	308.2	237.5
350				239.7	286.6	337.1	271.6
400				274.0	327.6	385.2	331.9
450					368.5	433.4	396.0
480					393.1	462.2	436.3
550						529.7	535.1
600						577.8	609.7

For optimised performance data, including performance based on diamond drilling technique, please use Ramset iExpert Anchoring Software.

Table 2a-2 Cracked Concrete effect, tension,  $X_{ncr}$

Anchor Size, $d_b$	Cracked Concrete Effect - $X_{ncr}$						$X_{ncr}$ where $\phi N_{uc} = \phi N_{ucc}$ (from Table 2a) = $\phi N_{ucc}$ (from Table 2a) = 0.70
	where $\phi N_{uc} = \phi N_{ucp}$ (from Table 2a)						
$f'_c$ (MPa)							
20 to 50	0.36	0.53	0.57	0.65	0.63	0.68	0.70

Bold values are at Chemset Anchor Stud nominal Depths. For Sustained Loads MULTIPLY  $\phi N_{uc}$  x 0.72 (100 years). All data relevant for Dry and Wet Holes. For Flooded Holes MULTIPLY  $\phi N_{uc}$  x 0.63 For Non-cracked concrete  $X_{ncr} = 1$ .

Calculate  $\phi N_{uc}$  for both  $\phi N_{ucp}$  and  $\phi N_{ucc}$  then choose the minimum - Refer to Checkpoint 2

Table 2b-1 Concrete service temperature limits effect, tension,  $X_{ts}$

Anchor Size, $d_b$	Service temperature limits effect, tension, $X_{ts}$						$X_{ts}$ where $\phi N_{uc} = \phi N_{ucc}$ (from Table 2a) = 1.00
	M10	M12	M16	M20	M24	M30	
Service temperature (°C)							
T1: -40°C to +40°C				1.00			1.00
T2: -40°C to +60°C				0.84			1.00
T3: -40°C to +75°C				0.26			1.00

Table 2b-2 Concrete compressive strength effect, tension,  $X_{nc}$

NON-CRACKED	Non-Cracked Concrete - $X_{nc}$						$X_{nc}$ where $\phi N_{uc} = \phi N_{ucc}$ (from Table 2a) = 0.79
	where $\phi N_{uc} = \phi N_{ucp}$ (from Table 2a)						
Anchor Size, $d_b$							
$f'_c$ (MPa)							
20	0.91	0.91	0.87	0.87	0.83	0.83	0.79
25	0.95	0.95	0.93	0.93	0.91	0.91	0.88
32	1.00	1.00	1.00	1.00	1.00	1.00	1.00
40	1.05	1.05	1.07	1.07	1.09	1.09	1.12
50	1.09	1.09	1.14	1.14	1.20	1.20	1.25


CRACKED	Cracked Concrete - $X_{nc}$						$X_{nc}$ where $\phi N_{uc} = \phi N_{ucc}$ (from Table 2a) = 0.79
	where $\phi N_{uc} = \phi N_{ucp}$ (from Table 2a)						
Anchor Size, $d_b$							
$f'_c$ (MPa)							
20	0.95	0.95	0.95	0.91	0.91	0.87	0.79
25	0.98	0.98	0.98	0.95	0.95	0.93	0.88
32	1.00	1.00	1.00	1.00	1.00	1.00	1.00
40	1.02	1.02	1.02	1.05	1.05	1.07	1.12
50	1.05	1.05	1.05	1.09	1.09	1.14	1.25

# ChemSet™ Reo 502™ Xtrem™

## STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

Chemical Anchoring - Anchor Studs



$$X_{ne} = 0.25 + 0.5 \cdot (e/h)$$


Where  $e_m \leq e \leq e_c$

$$e_c = 1.5 \cdot h$$

Note: Tabled values are based on the nominal effective depth, h shown in the installation details. For other values of  $X_{ne}$ , please use equation shown above.

Table 2c - Concrete Edge distance effect, tension,  $X_{ne}$

Anchor size, $d_b$	M10	M12	M16	M20	M24	M30
<b>Edge distance, e (mm)</b>						
40	0.47	0.43				
45	0.50	0.45	0.43			
50	0.53	0.48	0.45			
55	0.56	0.50	0.47	0.41		
60	0.58	0.52	0.49	0.43	0.39	
65	0.61	0.55	0.51	0.44	0.40	
70	0.64	0.57	0.53	0.46	0.42	
90	0.75	0.66	0.61	0.51	0.46	0.41
100	0.81	0.70	0.65	0.54	0.49	0.43
115	0.89	0.77	0.71	0.59	0.52	0.46
135	1	0.86	0.79	0.65	0.57	0.49
165		1	0.91	0.74	0.64	0.54
187			1	0.80	0.70	0.58
255				1	0.86	0.71
315					1	0.81
420						1



$$X_{na} = 0.5 + a/(6 \cdot h)$$

Where  $a_m \leq a \leq a_c$

$$a_c = 3 \cdot h$$

Note: Tabled values are based on the nominal effective depth, h shown in the installation details. For other values  $X_{na}$ , please use equation shown above.

Table 2d - Concrete anchor spacing effect, tension,  $X_{na}$

Anchor size, $d_b$	M10	M12	M16	M20	M24	M30
<b>Anchor spacing, a (mm)</b>						
40	0.57					
45	0.58					
50	0.59	0.58				
55	0.60	0.58				
60	0.61	0.59				
70	0.63	0.61	0.59			
85	0.66	0.63	0.61	0.58		
90	0.67	0.64	0.62	0.59	0.57	
140	0.76	0.71	0.69	0.64	0.61	0.58
170	0.81	0.76	0.73	0.67	0.63	0.60
200	0.87	0.80	0.77	0.70	0.66	0.62
270	1	0.91	0.86	0.76	0.71	0.66
330		1	0.94	0.82	0.76	0.70
375			1	0.87	0.80	0.72
510				1	0.90	0.80
630					1	0.88
840						1

**Checkpoint 2**

Design reduced ultimate concrete tensile capacity,  $\phi N_{urc}$

$$\phi N_{urc} = \text{minimum of } \phi N_{ucp} \cdot X_{ncr} \cdot X_{ns} \cdot X_{nc} \cdot X_{ne} \cdot X_{na} \text{ and } \phi N_{ucc} \cdot X_{ncr} \cdot X_{ns} \cdot X_{nc} \cdot X_{ne} \cdot X_{na}$$

**STEP 3**

### Verify anchor tensile capacity - per anchor

Table 3a Reduced characteristic ultimate steel tensile capacity,  $\phi N_{us}$  (kN) where  $\phi_n = 0.67$  for Gr 5.8 & Gr 8.8

Anchor size, $d_b$	M10	M12	M16	M20	M24	M30
ChemSet™ Anchor Stud Grade 5.8 Carbon Steel	18.9	28.1	53.9	81.3	117.8	-
ChemSet™ Anchor Stud A4/316 Stainless Steel	19.8	29.5	57.7	87.1	126.2	-
ChemSet™ Anchor Stud Grade 8.8 Carbon Steel	28.2	41.9	82.1	123.9	179.5	299.2

Note  $\phi_n = 0.58$  for ChemSet™ Anchor Stud A4/316 Stainless Steel

**Checkpoint 3**

Design reduced ultimate tensile capacity,  $\phi N_{ur}$

$$\phi N_{ur} = \text{minimum of } \phi N_{urc} \text{ or } \phi N_{us}$$

Check  $N^*/\phi N_{ur} \leq 1.0$ ,

if not satisfied return to step 1

# ChemSet™ Reo 502™ Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

Chemical Anchoring - Anchor Studs

## STEP 4

### Step 4 - Verify concrete shear capacity - per anchor

Table 4a - 1 Reduced characteristic ultimate concrete edge shear capacity,  $\phi V_{uc}$  (kN),  $\phi = 1/1.5 = 0.67$ ,  $f'_c = 32$  MPa


Anchor size, $d_b$	M10	M12	M16	M20	M24	M30
Effective depth, $h$ (mm)	70 - 200	90 - 240	110 - 320	150 - 400	160 - 480	210 - 600
Edge distance, $e_m$						
40	4.3	4.7				
45			6.2			
55				9.1		
60					10.8	
90						20.0

For optimised performance data, please use Ramset iExpert Anchoring Software.

Table 4a-2 Cracked Concrete effect, shear,  $X_{ver}$

Anchor size, $d_b$	M10	M12	M16	M20	M24	M30
$X_{ver}$	0.70					

For Non-cracked concrete  $X_{ver} = 1.0$




Load direction effect, conc. edge shear,  $X_{vd}$

Table 4b - Concrete compressive strength effect, shear,  $X_{vc}$

$f'_c$ (MPa)	20	25	32	40	50
$X_{vc}$	0.79	0.86	1	1.11	1.22

Table 4c - Concrete load direction effect, concrete edge shear,  $X_{vd}$

Angle, $\alpha^\circ$	0-55	60	70	80	90-180
$X_{vd}$	1	1.1	1.2	1.5	2




$$X_{ve} = e/e_m * \sqrt{e/e_m}$$

Table 4d - Concrete anchor spacing and edge distance effect, concrete edge shear,  $X_{ve}$

For single anchor fastening  $X_{ve}$


$e/e_m$	1.0	1.2	1.4	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2
$X_{ve}$	1.00	1.31	1.66	2.02	2.41	2.83	3.26	3.72	4.19	4.69	5.20	5.72



$$X_{ve} = \frac{3*e+a}{6*e_m} * \sqrt{e/e_m}$$

For 2 anchors fastening  $X_{ve}$

$e/e_m$	1.0	1.2	1.4	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2
$a/e_m$												
1.0	0.67	0.84	1.03	1.22	1.43	1.65	1.88	2.12	2.36	2.62	2.89	3.16
1.5	0.75	0.93	1.12	1.33	1.54	1.77	2.00	2.25	2.50	2.76	3.03	3.31
2.0	0.83	1.02	1.22	1.43	1.65	1.89	2.12	2.38	2.63	2.90	3.18	3.46
2.5	0.92	1.11	1.32	1.54	1.77	2.00	2.25	2.50	2.77	3.04	3.32	3.61
3.0	1.00	1.20	1.42	1.64	1.88	2.12	2.37	2.63	2.90	3.18	3.46	3.76
3.5		1.30	1.52	1.75	1.99	2.24	2.50	2.76	3.04	3.32	3.61	3.91
4.0			1.62	1.86	2.10	2.36	2.62	2.89	3.17	3.46	3.75	4.05
4.5				1.96	2.21	2.47	2.74	3.02	3.31	3.60	3.90	4.20
5.0					2.33	2.59	2.87	3.15	3.44	3.74	4.04	4.35
5.5						2.71	2.99	3.28	3.71	4.02	4.33	4.65
6.0						2.83	3.11	3.41	3.71	4.02	4.33	4.65



For 3 anchors fastening and more

$$X_{ve} = \frac{3*e + a_1 + a_2 + a_3 + \dots + a_{n-1}}{3*n*e_m} * \sqrt{e/e_m}$$

# ChemSet™ Reo 502™ Xtrem™

## STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

Chemical Anchoring - Anchor Studs

Table 4e Reduced characteristic ultimate concrete pryout capacity,  $\phi V_{ucp}$  (kN),  $\phi = 1/1.5 = 0.67$ ,  $f'_c = 32$  MPa

Anchor size, $d_b$	M10	M12	M16	M20	M24	M30
Effective depth, h (mm)	90	110	125	170	210	280
-40°C to +40°C	70.8	95.7	116.0	183.9	252.5	388.7
-40°C to +60°C	59.5	83.2	116.0	183.9	252.5	388.7
-40°C to +75°C	18.4	25.7	37.9	60.5	89.4	140.2




Table 4f Anchor at a corner effect, concrete edge shear,  $X_{vs}$

Note: For  $e_1/e_2 > 1.25$ ,  $X_{vs} = 1.0$

Edge distance, $e_2$ (mm)	25	30	35	50	60	75	125	200	300	400	600	900
Edge distance, $e_1$ (mm)												
25	0.86	0.77	0.70	0.58	0.53	0.49	0.41	0.37	0.35	0.34	0.32	0.32
30	0.97	0.86	0.78	0.64	0.58	0.52	0.43	0.38	0.36	0.34	0.33	0.32
35	1.00	0.95	0.86	0.69	0.63	0.56	0.46	0.40	0.37	0.35	0.33	0.32
50	1.00	1.00	1.00	0.86	0.77	0.67	0.52	0.44	0.39	0.37	0.35	0.33
60	1.00	1.00	1.00	0.97	0.86	0.75	0.57	0.47	0.41	0.38	0.36	0.34
75	1.00	1.00	1.00	1.00	1.00	0.86	0.64	0.51	0.44	0.41	0.37	0.35
125	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.65	0.53	0.48	0.42	0.38
200	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.67	0.58	0.49	0.42
300	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.72	0.58	0.49
400	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.67	0.55
500	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.77	0.61
600	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.67
900	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86

Checkpoint **4a**

Design reduced ultimate concrete edge shear capacity,  $\phi V_{urc}$   
 $\phi V_{urc} = \phi V_{uc} * X_{vcr} * X_{vc} * X_{vd} * X_{ve} * X_{vs}$

Checkpoint **4b**

Design reduced ultimate concrete pryout capacity,  $\phi V_{urcp}$   
 $\phi V_{urcp} = \phi V_{ucp} * X_{ncr} * X_{nc} * X_{ne} * X_{na}$

STEP **5**

### Verify anchor shear capacity - per anchor

Table 5a Reduced characteristic ultimate steel shear capacity,  $\phi V_{us}$  (kN) where  $\phi_v = 0.67$

Anchor size, $d_b$	M10	M12	M16	M20	M24	M30
ChemSet™ Anchor Stud Grade 5.8 Carbon Steel	11.8	17.5	33.1	49.9	72.3	-
ChemSet™ Anchor Stud A4/316 Stainless Steel	14.2	21.1	41.4	62.4	90.4	-
ChemSet™ Anchor Stud Grade 8.8 Carbon Steel	17.5	26.0	50.9	76.8	111.3	185.5

Checkpoint **5**

Design reduced ultimate shear capacity,  $\phi V_{ur}$   
 $\phi V_{ur} = \text{minimum of } \phi V_{urc} \phi V_{urcp} \phi V_{us}$   
 Check  $V^*/\phi V_{ur} \leq 1.0$ ,  
 if not satisfied return to step 1

# ChemSet™ Reo 502™ Xtrem™

STRENGTH LIMIT STATE DESIGN

AVAILABLE IN AUSTRALIA ONLY

## STEP 6 Combined Loading

### Checkpoint 6

Check

$N^*/\phi N_{ur} + V^*/\phi V_{ur} \leq 1.2$ ,  
if not satisfied return to step 1

#### Specify - Threaded Stud Anchors

Ramset™ ChemSet™ Reo 502™ Xtrem™ with  
(Anchor Size) grade 5.8 ChemSet™ Anchor  
Stud (Anchor Stud Part Number) Drilled  
Hole Depth to be (h) mm.

#### Example

Ramset™ ChemSet™ Reo 502™ Xtrem™  
Injection with M16 grade 5.8 ChemSet™  
Anchor Stud (CS16190GH). Drilled hole depth  
to be 125mm. To be installed according to  
Ramset™ Installation Instructions.

Ramset™ iExpert Anchor Software for optimised calculation or where a greater range of anchor layout detail is needed.